

## SPIDER TENT FOR FAN

### IN SET



x 1

built-in fan




x 4-6\*

extraction ropes



x 4-6\*

anchors



x 20-30\*

eyelet pins



x 1


mounting hammer




x 1

transport bag


### ASSEMBLY INSTRUCTION

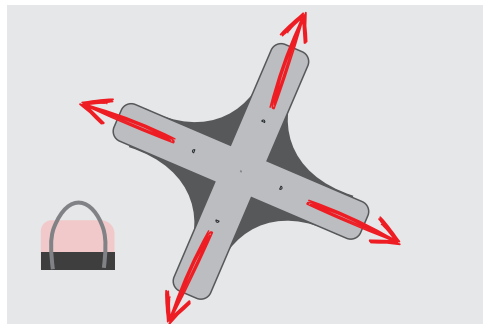


- 1 Take out and unroll the tent with the outside facing up. Stretch each leg to its full length. If possible, use a ground sheet to protect the groundsheet from dirt.

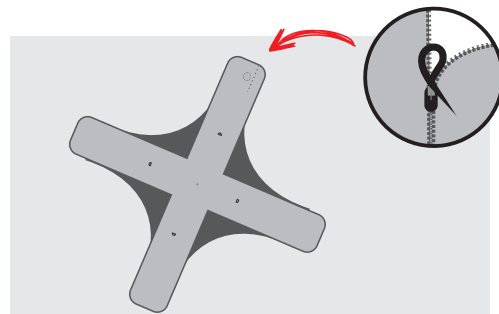


- 2 Fasten the lock next to the fan and the locks at the base of each tent leg.

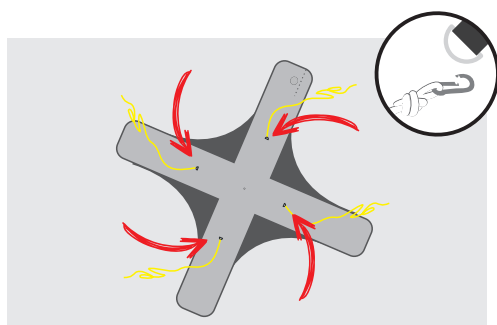


- 3 Attach the ropes to the lashing eyes in the tent using snap hooks.

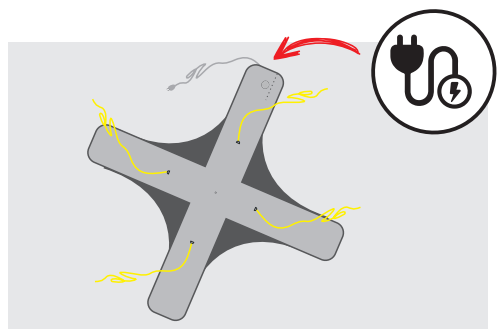

- 4 Plug in the fan power cable from the tent and wait until it fills with air. Remember not to obstruct the fan inlet!

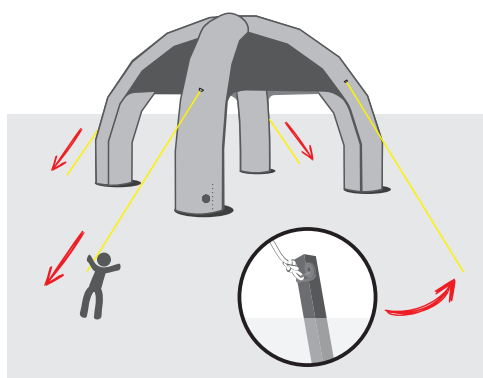

- 5 Stabilise the tent with ropes, then fix them to the ground with anchors using a hammer. The lashing lines should be taut and stretched to their full length.

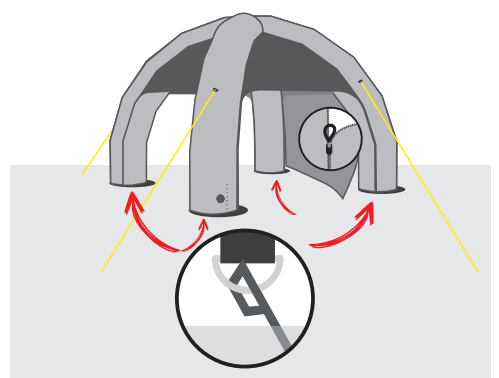

- 6 Stabilise the tent legs with lashings. Fix them to the ground with pegs using a hammer. Zip up the tent walls and stabilise them to the ground with pegs.

**!** For ground that prevents the use of pins/anchors, use dedicated elliptical tent weights.

\* depending on tent size and model

## SPIDER TENT FOR FAN

### IN SET



x 1

built-in fan




x 4-6\*

extraction ropes



x 4-6\*

anchors



x 20-30\*

eyelet pins



x 1


mounting hammer




x 1

transport bag


### DISSASSEMBLY INSTRUCTION

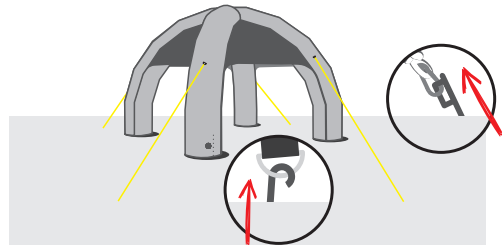

- 1 Remove all anchors/pins from the ground from the lashing lines and bases. Detach the walls. If possible apply a protective sheet to the ground.

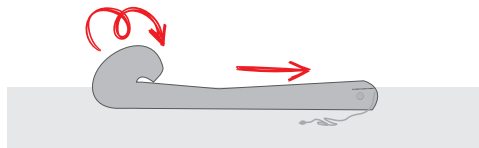

- 3 Wait until all the air has escaped from the product. Unfasten all lashing cords attached with snap hooks to each leg. Fold the tent and start slowly rolling the product from the top of the tent towards the base (fan/open zips).

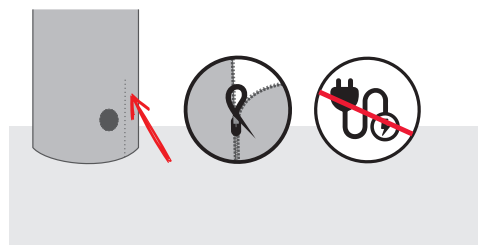

- 2 Unplug the product and undo the zipper next to the fan and in the base of each leg. This will start to release air from the product.



- 4 Assemble and pack the mounting kit into the accessory bag. Pack the product and the accessory bag and accessory bag into the dedicated carry bag.

### INSTRUCTION OF USE

1. Please read the product assembly/disassembly instructions before assembly.
2. When transporting, setting up and assembling the product, take special care to avoid damage to the product or injury during assembly.
3. Before disassembling the product, ensure that there are no sharp objects, tools, etc. with sharp edges in the area where the product will be assembled.
4. Check the condition of the electrical cables before connecting to avoid electric shock.
5. Do not obstruct the fan. The product should be positioned so that the ventilation hole has free access to air.
6. To avoid tripping hazards, the extraction cords should be positioned outside the passageways. If the lashings have to cross passageways or are close to passageways, they must be clearly marked (e.g. with warning tape).
7. During increasing gusts of wind, the seating of the pins/anchors must be checked systematically. In winds above 38km/h, the product must be assembled immediately.
8. During rain or snowfall, excess water/snow should be systematically removed from the product.
9. Any soiling must be removed immediately with a damp cloth and warm water without using detergents. The use of high-pressure cleaners is prohibited.
10. The product should be cleaned and dry before disassembly. If, due to weather or other circumstances, the product is assembled wet and dirty, it should be disassembled again as soon as possible, dried and cleaned.
11. The product should be stored in a dry and clean place.



risk of ignition following contact with a fire or ignition source



risk of entanglement or tripping over lashing ropes



risk of overturning due to incorrect installation or strong winds



inappropriate use e.g. climbing



risk of damage to the power cable, e.g. on an electric pump

\* depending on tent size and model